



GOLDEN DUNE GRANITE

Golden Dune Granite has long been prized for its durability and its warm tones. Quarried in the coastal provinces of China, this large-grained stone has been the choice of Chinese builders for centuries. The granite's warm color varies with the depth of the quarry, ranging from dark golden to near off-white, showing specks of cardinal bright ochre and black. Interesting color variations occur within individual pieces, especially those cut in large formats. Our fine hand finishes complement and enhance the natural texture of the exposed

minerals in this timeless and versatile material. Typically, tool marks lighten the stone, creating a cool ivory color that offers a striking contrast to the warmer, toasted, unmarked surface.

Golden Dune Granite's most popular finishes are split face, point stalk, and bush hammer. It is ideal for both large and small scale applications including paving, veneer, one-piece sinks and tubs, tabletops, and decorative pieces. Golden Dune Granite pavers are often installed sand set.



RECOMMENDED USES


PAVERS	DRAIN GRATES
VENEER	CARVED OBJECTS
STAIR BLOCKS	COLUMNS
QUOINS	SINKS / TUBS
COPING / CAPS	SLABS
CURBS	COBBLESTONES
SILLS / LINTELS	WATER WALL

PROJECTS

The Belvedere, BrightView, Dillon Residence, Drumlin Hall, Firman Residence, Goldberg Eggs, Madison Lake Front, Microsoft Fountain, Hawthorne House, Orinda Public Library, Perrell Residence, Tarook House

INSTALLATION

Golden Dune Granite takes all textures well and may be installed in any of the standard setting techniques: mortar or thinset on slab or by sand setting.

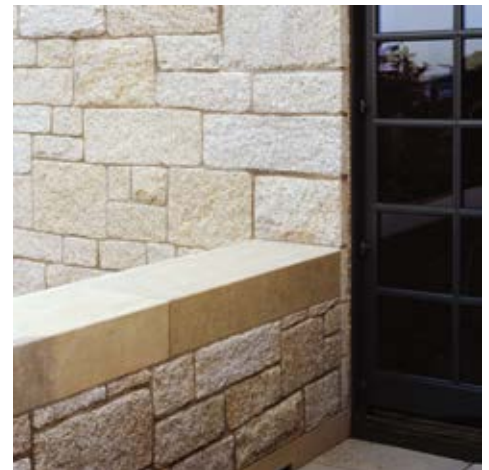

UNITED STATES OF AMERICA
 TEL +1 206 709 3000

AUSTRALIA
 TEL +61 3 8199 9555

CHINA
 TEL +86 592 533 0273

rhodes-stone.com
info@rhodes-stone.com



GOLDEN DUNE GRANITE



HONED
 min thickness - 0.75" / 20 mm



BUSH HAMMER
 min thickness - 1.5" / 38 mm



FINE ADZE
 min thickness - 1.5" / 38 mm



COARSE ADZE
 min thickness - 2" / 50 mm



2 POINT STALK
 min thickness - 1.5" / 38 mm



PINEAPPLE
 min thickness - 3" / 75 mm



SPLIT
 min thickness - 3" / 75 mm

MATERIAL SPECIFICATIONS

STANDARD BLOCK : 78" x 52" x 30"
 2000 x 1300 x 750 mm

MAX SPECIAL BLOCK : 92" x 60" x 30"
 2350 x 1500 x 750 mm

STANDARD VENEER : 3" x 3" to 16" x 26"; 3" thick
 75 x 75 mm to 400 x 650 mm; 75 mm thick

STANDARD PAVERS :

12" x 12" to 24" x 30"; 0.75" - 3" thick
 4" x 4"; 2.5 - 4" thick cobblestones
 8" x 4"; 2.5 - 4" thick cobblestones
 300 x 300 mm to 600 x 750 mm; 20 - 75 mm thick
 100 x 100 mm; 60 - 100 mm thick cobblestones
 200 x 100 mm; 60 - 100 mm thick cobblestones



TECHNICAL DATA

ASTM	TEST	
C97	absorption	0.37 %
C97	bulk gravity	162 lbs/ft ³ 2,600 kg/m ³
C99	mod. of rupture	1,291 psi 8.9 MPa
C170	compressive strength	26,107 psi 180 MPa
C880	flexural strength	1,392 psi 9.6 MPa
C241	abrasion resistance	37 Ha

UNITED STATES OF AMERICA
 TEL +1 206 709 3000

AUSTRALIA
 TEL +61 3 8199 9555

CHINA
 TEL +86 592 533 0273

rhodes-stone.com
info@rhodes-stone.com